




TEKNISK INFORMATION

ST6 FX

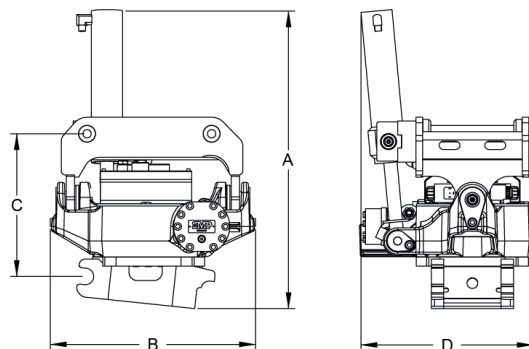

Modell

ST6FX

Specifikationer

Dimension A (mm)	720
Dimension B (mm)	495
Dimension C (mm)	410
Dimension D (mm)	415
Maximal tiltvinkel (°)	45
Vikt (kg)	160
Vikt grip (kg)	60/78 (S40/S45-50)
Griplons öppningsbredd (mm)	460/650 (S40/S50)

Dimensions, weights and tilt angle may vary depending on the configuration.

Prestandasiffror

Standard svivel - Flöde extrafunktion (l/min)	60-65
High flow svivel - Flöde genom NG10 (l/min)	-
High flow svivel - Flöde i "bypass" (l/min)	-
Tiltmoment (Nm)	12,3
Rotationsmoment (kNm)	5

Funktioner

Maskingränssnitt	Direct mount, S40, S45, S50
Coupler	S40, S45, S50
Dubbel extrafunktion	Manual switch
Slangbrottsventiler på cylinder	V
Teleskopcylindrar	-
Centralsmörjpunkt	V
Högflödesrotator (120/200 l/min)	-
GPS-gateway	Option

Bärarmaskin

Maskinvikt (t)	3 - 6
Maximal brytkraft (kN)	50
Maximalt brytmoment (kNm)	44
Maximal skopbredd (mm)	1300